


LONG LIFE ASSURANCE


- Wide temperature range -55 ~ +105°
CLoad life of 2000~3000 hours
- Comply with the RoHS directive
- RoHS

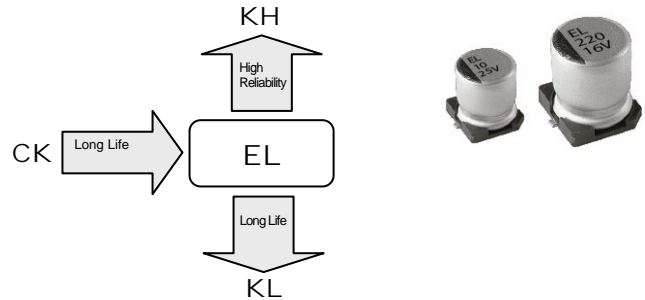

SPECIFICATIONS

Items	Characteristics																																							
Operation Temperature Range	-55 ~ +105°C																																							
Voltage Range	6.3 ~ 50V																																							
Capacitance Range	0.1 ~ 1500μF																																							
Capacitance Tolerance	±20% at 120Hz, 20°C																																							
Leakage Current	Leakage current (∅4~∅10) ≅ 0.01CV or 3μA, whichever is greater (after 2 minutes application of rated voltage) Leakage current (∅12.5~∅16) ≅ 0.03CV or 4μA, whichever is greater (after 1 minute application of rated voltage)																																							
Dissipation Factor (tan δ)	Measurement frequency : 120Hz, Temperature : 20°C <table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">tan δ (max.)</td> <td>∅4~∅10</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.13</td> <td>0.12</td> </tr> <tr> <td>∅12.5~∅16</td> <td>0.38</td> <td>0.34</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> </tr> </tbody> </table>	Rated Voltage (V)	6.3	10	16	25	35	50	tan δ (max.)	∅4~∅10	0.28	0.24	0.20	0.16	0.13	0.12	∅12.5~∅16	0.38	0.34	0.30	0.26	0.22	0.18																	
Rated Voltage (V)	6.3	10	16	25	35	50																																		
tan δ (max.)	∅4~∅10	0.28	0.24	0.20	0.16	0.13	0.12																																	
	∅12.5~∅16	0.38	0.34	0.30	0.26	0.22	0.18																																	
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <thead> <tr> <th colspan="2">Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance Ratio</td> <td>∅4~∅10</td> <td>Z(-25°C) / Z(20°C)</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td rowspan="2">ZT/Z20 (max.)</td> <td>∅12.5~∅16</td> <td>Z(-25°C) / Z(20°C)</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> <tr> <td rowspan="2"></td> <td rowspan="2">∅12.5~∅16</td> <td>Z(-25°C) / Z(20°C)</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C) / Z(20°C)</td> <td>12</td> <td>10</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> </tr> </tbody> </table>	Rated Voltage (V)		6.3	10	16	25	35	50	Impedance Ratio	∅4~∅10	Z(-25°C) / Z(20°C)	3	3	2	2	2	ZT/Z20 (max.)	∅12.5~∅16	Z(-25°C) / Z(20°C)	8	5	4	3	3		∅12.5~∅16	Z(-25°C) / Z(20°C)	5	4	3	2	2	Z(-55°C) / Z(20°C)	12	10	8	5	4	3
Rated Voltage (V)		6.3	10	16	25	35	50																																	
Impedance Ratio	∅4~∅10	Z(-25°C) / Z(20°C)	3	3	2	2	2																																	
	ZT/Z20 (max.)	∅12.5~∅16	Z(-25°C) / Z(20°C)	8	5	4	3	3																																
		∅12.5~∅16	Z(-25°C) / Z(20°C)	5	4	3	2	2																																
	Z(-55°C) / Z(20°C)		12	10	8	5	4	3																																
Load Life	After 3000 hrs. (2000 hrs. for ∅4~∅6.3x5.4 & ∅8x6.2) application of the rated voltage at 105°C, they meet the characteristics listed below. <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±25% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>200% or less of initial specified value</td> </tr> <tr> <td>Leakage Current</td> <td>initial specified value or less</td> </tr> </tbody> </table>	Capacitance Change	Within ±25% of initial value	Dissipation Factor	200% or less of initial specified value	Leakage Current	initial specified value or less																																	
Capacitance Change	Within ±25% of initial value																																							
Dissipation Factor	200% or less of initial specified value																																							
Leakage Current	initial specified value or less																																							
Shelf Life	After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for load life characteristics listed above.																																							
Resistance to Soldering Heat	After reflow soldering and restored at room temperature, they meet the characteristics listed below. <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>initial specified value or less</td> </tr> <tr> <td>Leakage Current</td> <td>initial specified value or less</td> </tr> </tbody> </table>	Capacitance Change	Within ±10% of initial value	Dissipation Factor	initial specified value or less	Leakage Current	initial specified value or less																																	
Capacitance Change	Within ±10% of initial value																																							
Dissipation Factor	initial specified value or less																																							
Leakage Current	initial specified value or less																																							
Marking	Black print on the case top.																																							

DRAWING (Unit: mm)

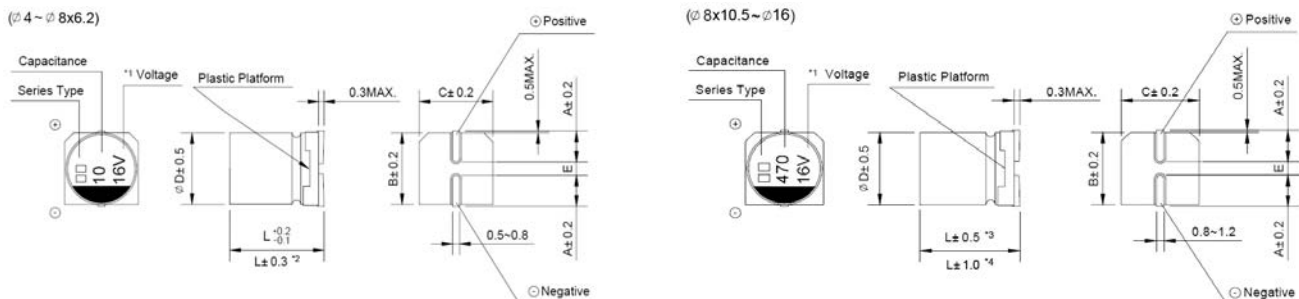

*1. Voltage mark for 6.3V is [6V]

*2. Applicable to ∅6.3x7.7

*3. Applicable to ∅8x10.5~∅10

*4. Applicable to ∅12.5~∅16

NOTE: All designs and specifications are for reference only and are subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.



□ DIMENSIONS (Unit: mm)

∅D x L	4 x 5.8	5 x 5.8	6.3 x 5.8	6.3 x 7.7	8 x 6.2	8 x 10.5	10 x 10.5	10 x 13.5	12.5 x 13.5	12.5 x 16	16 x 16.5
A	1.8	2.1	2.4	2.4	3.3	2.9	3.2	3.2	4.7	4.7	5.5
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	13.0	13.0	17.0
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3	13.0	13.0	17.0
E ± 0.2	1.0	1.3	2.2	2.2	2.2	3.1	4.4	4.4	4.4	4.4	6.7
L	5.4	5.4	5.4	7.7	6.2	10.5	10.5	13.5	13.5	16.0	16.5

□ DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV Code	6.3		10		16		25		35		50	
		0J		1A		1C		1E		1V		1H	
0.1	0R1											4 x 5.8	1
0.22	R22											4 x 5.8	2
0.33	R33											4 x 5.8	3
0.47	R47											4 x 5.8	5
1	010											4 x 5.8	10
2.2	2R2											4 x 5.8	16
3.3	3R3											4 x 5.8	16
4.7	4R7							4 x 5.8	13	4 x 5.8	14	5 x 5.8	23
10	100					4 x 5.8	18	5 x 5.8	20	5 x 5.8	21	6.3 x 5.8	35
22	220	4 x 5.8	22	5 x 5.8	25	5 x 5.8	27	6.3 x 5.8	36	6.3 x 5.8	38	6.3 x 7.7 (8 x 6.2)	70 (70)
33	330	5 x 5.8	27	5 x 5.8	30	6.3 x 5.8	40	6.3 x 5.8	60	6.3 x 7.7 (8 x 6.2)	84 (84)	8 x 10.5	90
47	470	5 x 5.8	33	6.3 x 5.8	41	6.3 x 5.8	48	6.3 x 7.7 (8 x 6.2)	90 (91)	8 x 10.5	98	8 x 10.5	90
100	101	6.3 x 5.8	50	6.3 x 5.8 (8 x 6.2)	53 (110)	6.3 x 5.8	60	8 x 10.5	130	8 x 10.5	130	10 x 10.5	100
150	151	6.3 x 5.8	55	6.3 x 7.7	105	6.3 x 7.7	95	8 x 10.5	140	10 x 10.5	315	10 x 10.5	100
220	221	6.3 x 7.7	100	8 x 10.5	210	8 x 10.5	210	10 x 10.5	190	10 x 10.5	315	10 x 13.5 (10 x 10.5)	250 (100)
330	331	8 x 10.5	210	8 x 10.5	210	8 x 10.5	210	10 x 10.5	315	10 x 10.5	315	12.5 x 13.5	400
470	471	8 x 10.5	210	10 x 10.5	315	10 x 10.5	315	10 x 10.5	315	12.5 x 13.5 (10 x 13.5)	500 (360)	16 x 16.5 (12.5 x 16)	650 (500)
680	681	8 x 10.5	210	10 x 10.5	315	10 x 10.5	315	10 x 13.5	380	12.5 x 13.5	500		
1000	102	10 x 10.5	315	10 x 13.5 (10 x 10.5)	360 (315)	12.5x13.5 (10x13.5) (10x10.5)	450 (350) (315)	12.5 x 13.5	550	16 x 16.5 (12.5 x 16)	700 (550)		
1500	152	10 x 13.5 (10 x 10.5)	450 (315)	12.5 x 13.5	500	12.5 x 13.5	500	12.5 x 16	800				
2200	222	12.5 x 13.5	620	12.5 x 16 (12.5x13.5)	650 (600)	16 x 16.5	900	16 x 16.5	1000			Case size	Ripple current
3300	332	12.5 x 16	750	16 x 16.5	950								

•Case size ∅DxL(mm), ripple current (mA rms) at 105°C 120Hz

□ FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT

Frequency			50Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient	∅4 ~ ∅10	0.1 ~ 100μF	0.70	1.00	1.17	1.36	1.50
		150 ~ 1500μF	0.85	1.00	1.08	1.20	1.30
	∅12.5 ~ ∅16	~ 470μF	0.75	1.00	1.35	1.57	2.00
		680 ~ 3300μF	0.85	1.00	1.23	1.34	1.50

- Taping specifications are given in page 11.
- Please refer to page 12 for the minimum package quantity.

NOTE: All designs and specifications are for reference only and are subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.