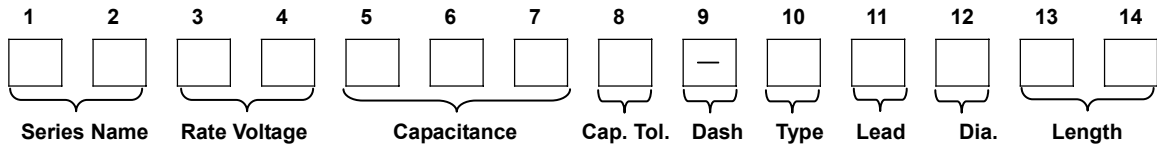


**V-CHIP ALUMINUM ELECTROLYTIC CAPACITORS**
**EXPLANATION OF PART NUMBER**


(1,2)	(3,4)	(5-7)	(8)	(10)	(12)	(13,14)							
Series	Voltage (W.V.)	Code	Capacitance (µF)	Code	Cap.Tolerance (%)	Code	Type	Code	Diameter (Ø)	Code	Length (mm)	Code	
CS	4	0G	0.1	0R1	+10	K	Chip	C	4	C	5.4	54	
CK	6.3	0J	0.22	R22	-10								
SC	10	1A	0.33	R33	+15	L			5	D	5.8	58	
CN	16	1C	0.47	R47	-15								
KP	25	1E	1	010	+20	M			6.3	E	6.2	62	
LZ	35	1V	2.2	2R2	-20								
KZ	40	1G	3.3	3R3	+20	V	Type	Lead Configuration	Code	8	F	7.7	77
FZ	50	1H	4.7	4R7	-10					Chip	Taping& Reel	R	10
EL	63	1J	10	100					12.5	I	13.5	13	
KL	75	1T	22	220					13.5	V	16(16.5)	16	
KH	80	1K	33	330					16	K	21	21	
HU	85	1R	47	470									
	100	2A	68	680									
	160	2C	100	101									
	180	2Z	220	221									
	200	2D	330	331									
	250	2E	470	471									
	315	2F	680	681									
	330	2U	1000	102									
	350	2V	2200	222									
	400	2G	3300	332									
	450	2W	4700	472									
			6800	682									

**NOTE:** All designs and specifications are for reference only and are subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.