

NPN Silicon Epitaxial Planar Transistor


for audio frequency general purpose amplifier applications.

The transistor is subdivided into four groups O, Y, G and L, according to its DC current gain.

Features

- High voltage and high current: $V_{CEO}=50V$, $I_C=150mA(\text{max})$
- High h_{FE} : $h_{FE}=70\sim 700$
- Low noise: $NF=1dB(\text{typ.})$, $10dB(\text{max})$
- Small package

SOT-23



1.BASE 2.EMITTER 3.COLLECTOR








SOT-23 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	60	V
Collector Emitter Voltage	V_{CEO}	50	V
Emitter Base Voltage	V_{EBO}	5	V
Collector Current	I_C	150	mA
Base Current	I_B	30	mA
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_s	-55 to +125	$^\circ\text{C}$

Characteristics at $T_{amb}=25\text{ }^{\circ}\text{C}$

	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at $V_{CE}=6\text{V}$, $I_C=2\text{mA}$	O	h_{FE}	70	-	140	-
	Y	h_{FE}	120	-	240	-
	G	h_{FE}	200	-	400	-
	L	h_{FE}	350	-	700	-
Collector Cutoff Current at $V_{CB}=60\text{V}$		I_{CBO}	-	-	0.1	μA
Emitter Cutoff Current at $V_{EB}=5\text{V}$		I_{EBO}	-	-	0.1	μA
Collector Saturation Voltage at $I_C=100\text{mA}$, $I_B=10\text{mA}$		$V_{CE(sat)}$	-	-	0.25	V
Transition Frequency at $V_{CE}=10\text{V}$, $I_C=1\text{mA}$		f_T	80	-	-	MHz
Collector Output Capacitance at $V_{CB}=10\text{V}$, $f=1\text{MHz}$		C_{ob}	-	2	3.5	pF
Noise Figure at $V_{CE}=6\text{V}$, $I_C=0.1\text{mA}$, $f=1\text{KHz}$, $R_g=10\text{K}\Omega$		NF	-	1	10	dB

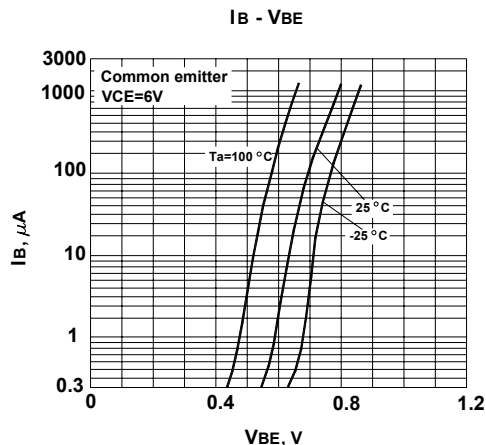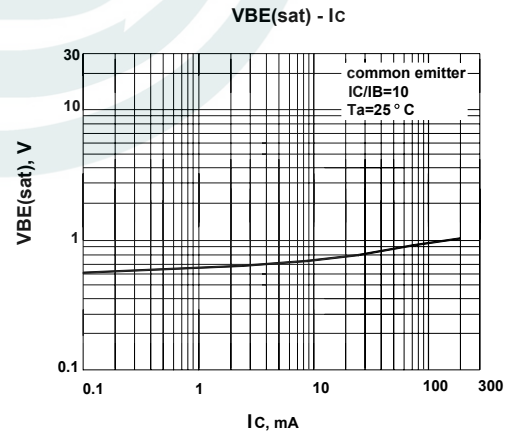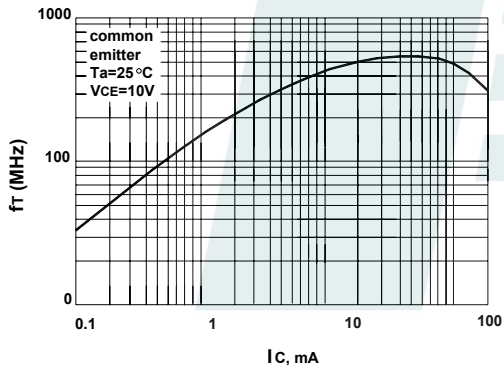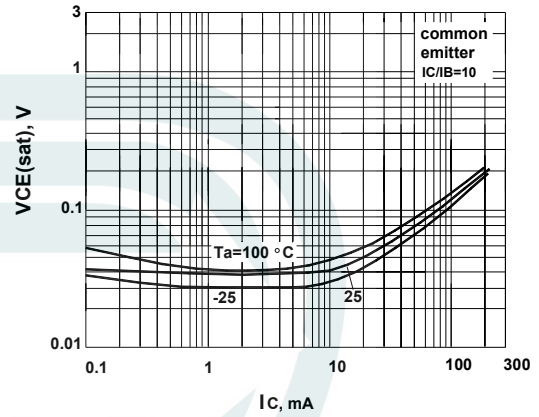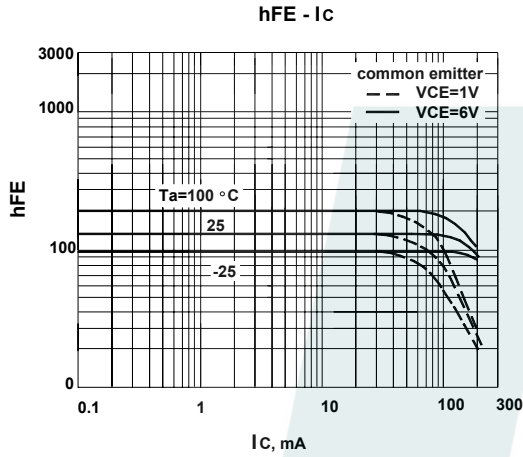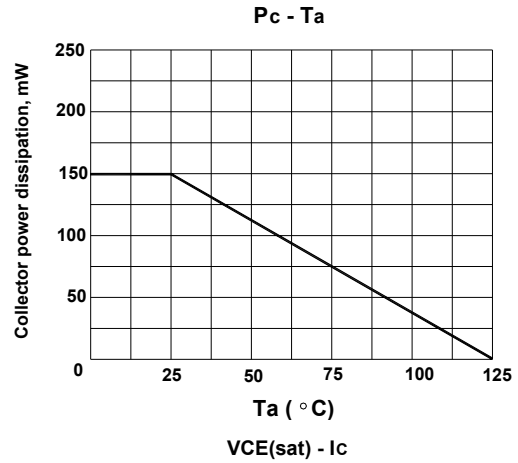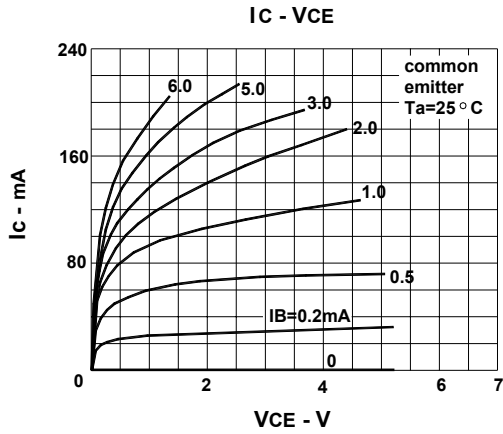

Inquire@party-itl.com